

FUJI WATER LEAK DETECTOR

HG-10A II

FEATURES

- Ground Microphone(Pick-up)equipped with the characteristic ball to break wind noise, has high sensitivity. (U.S.A.Patent 5, 959, 210)
- Lightweight Hand-set of only 500g including the Pick-up minimizes fatigue during the leak detection work continued for many hours.
- Large Meter deflects sensitively and indicates clearly the intensity of leak sound.
- Ergonomic Keys and Knob arranged on the panel have been designed for the work by one-handed operation.
- Solidstate Component without leads is designed to minimize malfunction during the use of long time.

FILTER COMBINATION


Nine(9)ways of Filter Combination are selectable as follows. Those Filtering Ranges enable the Operator to distinguish the leak sound from other noise.

LOW			HIGH			Filter Combination
100	200	400Hz	600	800	1200Hz	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	100Hz ~ 600Hz
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	100Hz ~ 800Hz
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	100Hz ~ 1200Hz
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	200Hz ~ 600Hz
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	200Hz ~ 800Hz
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	400Hz ~ 1200Hz
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	400Hz ~ 600Hz
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	400Hz ~ 800Hz
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	400Hz ~ 1200Hz

FILTER BAND WIDTH

The following four (4) Filter Band Widths are recommended as the basic selection on site.

Pipes	Hz	100	200	400	600	800	1200
Distribution Pipe of Cast Iron Pipe.			⊙←	-----	-----	→⊙	
Distribution Pipe of Vinyl Pipe.		⊙←	-----	-----	→⊙		
Service Pipe of Vinyl Pipe.			⊙←	-----	-----	→⊙	
Service Pipe of Galvanized Pipe.				⊙←	-----	-----	→⊙

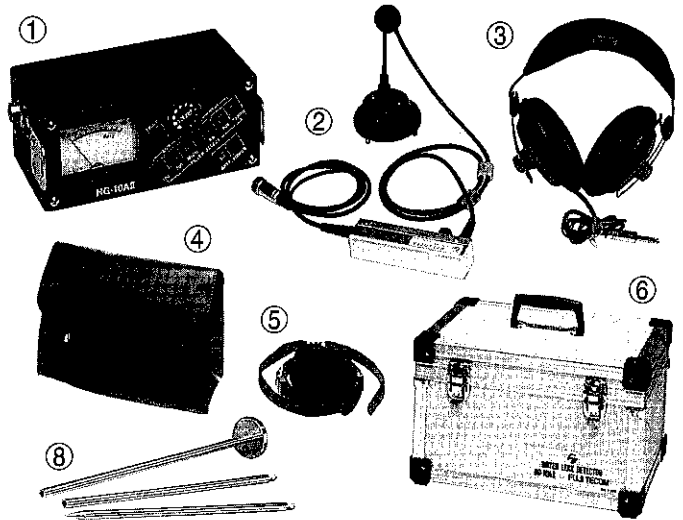

STRUCTURE

① Amplifier	1
② Hand-set with Sensor	1
③ Headphones	1
④ Soft Case for Amplifier	1
⑤ Shoulder Belt	1
⑥ Carrying Case	1
⑦ Operation Manual	1
⑧ 3-Section Contact Bar with Sensor Table (Option)	1

SPECIFICATIONS

(AMPLIFIER)

Amplification	: 59.0dB±3dB
Filters	: Low Range High Range
	: 100Hz~ 600Hz~
	: 200Hz~ 800Hz~
	: 400Hz~ 1200Hz~
Operation Temperature	: -10°C +55°C
Power Consumption	: 70mA or less (Back Light ON)
	: 35mA or less (Back Light OFF)
Power Source	: UM-3 (AA) Alkaline Battery 1.5V×6pcs.(9V.DC)

(SENSOR / PICK-UP)

Sensitivity	: 0.7V/g or more (at 400Hz)
-------------	-----------------------------

(HEADPHONES)

Impedance	: 8 ohm (Stereophonic Type)
-----------	-----------------------------

(SIZE and WEIGHT)

Amplifier	: 170(W)×70(D)×103(H) mm
	: 1.3kg including the Hand-set and Sensor

We reserve the right to change specifications without prior notice.



Instruments for the location of underground utilities and water leaks.

FUJI TECOM INC.

Head office : 2-20, Kanda Sakuma-cho, Chiyoda-ku, Tokyo 101-0025, Japan
 TEL : +81-3-3862-3196 FAX : +81-3-3866-1979
 Web Site : <http://www.fujitecom.com/>
 E-Mail : kaigai@fujitecom.co.jp

Branch office : Sapporo, Sendai, Tokyo, Shinetsu, Nagoya, Osaka
 Hiroshima, Kyushu

Technical development & training center : Niiza

AGENT

DETECTION SOLUTIONS

Phone Aus **1300 885 383**

www.detectionsolutions.com.au