



# Specifications

## Power Supply:

Textlog (Single Cell) 5 years  
(Life expectancy based on 15 minute single channel logging)  
Extended Battery Life Option Available

## Standard Memory Capacities:

1 Channel Analogue Input 5 years  
1 Channel Bi-directional Pulse Input 3.5 years  
2 Channel Bi-directional Pulse Input 1.8 years  
4 Channel Non-directional Pulse Input 1.8 years

## Logging and Communications

Logging interval 1 minute to 24 hours  
Manual data upload All data, 1 month, 3, month, user defined, data since last read  
Local serial (cable or IR) 57600 baud

## Pulse Inputs:

1 Channel Bi-directional  
2 Channel Bi-directional  
3 Channel 1 Bi-directional, 1 Non-directional  
4 Channel 4 Non-directional

## Encoded Inputs:

Direct read from ABB, Elster, Sensus, Smartmeter and other serial output and/or encoded meters

## Analogue Inputs:

Resolution 16 Bit  
Accuracy 0.25% Full Scale as standard  
0.1% Full Scale optional  
Integral power for transmitters 5, 10 V  
Pressure 0 - 5, 0 - 10, 0 - 20 Bar  
Current 0 - 10, 0 - 20, 4 - 20 mA  
Voltage 0 - 1, 0 - 5, 0 - 10 V  
Ashridge custom depth and pressure transmitters available upto 20 Bar

## Dimensions (excluding connectors):

Textlog Diameter x Length  
140 x 63 mm



# Textlog



- Rugged waterproof data logger (IP68)
- Long battery life
- Pulse & pressure inputs
- Meter register direct read
- Remote data access, (SMS, GPRS)
- Infra-red local comms



Australia  
A15 / 276 New Line Road, Dural  
PO Box 3222, Dural, NSW 2158  
Phone: 1300-885 383  
website [www.detectionsolutions.com.au](http://www.detectionsolutions.com.au)  
New Zealand  
Unit J, 150 Harris Rd, East Tamaki, Auckland  
PO Box 38 061, Howick, Auckland  
Phone: (+64 9) 576 8000 Fax: (+64 9) 576 4641




subject to change without notification





# Product Features and Models

- Compact unit with integrated battery offering in excess of 5 years at 1 SMS per day
- Data transmission: SMS or GPRS
- Wide variety of inputs options (digital and analogue)
- Optional Internal Pressure Transmitter
- PC software allows exporting of data
- PC or PDA configuration software available
- Graphical representation of data with PC software
- IP68 as standard
- Flexible logging periods
- Remote configuration with SMS or GPRS
- Optional external antenna

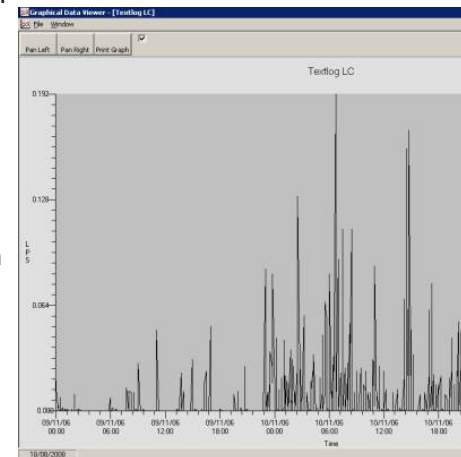

## Models available

- Single or dual pulse input & external analogue input
- Single or dual pulse input & meter reader input
- Single or dual pulse input & 2 external analogue inputs
- Up to four pulse inputs & external analogue input
- Single or dual pulse input & internal pressure input (0.1% accuracy)
- Temperature inputs
- Extended battery life options

# Typical Applications

- Reservoir water level monitoring & alarming
- Borehole water level monitoring & alarming
- Low Power Telemetry
- Flow logging & alarming
- Nightline usage monitoring & alarming
- Automated meter reading & alarming
- Pressure monitoring & alarming
- Remote tank gauging & alarming
- Remote environmental monitoring & alarming
- Remote temperature monitoring & alarming

## GSM Signal Strength Test Set

The D2366 GSM radio test set can be used to survey all available GSM networks to determine the best provider for a specific site with the best signal strength and quality.